

# TFXL - Series

5t – 8t Excavator



The **TFXL-Q Series** is designed for mulching up to 8 inches. Fixed tool holder allows the user to install carbide teeth or chipping tools onto the same mount, which are 180 degree reversible. Equipped with 45cc fixed piston motor or optional with Bosch Rexroth Variable displacement motor. Comes standard with a hydraulic door and **Bite Limiter Rotor**




TFXL 80 shown in Picture

# TFXL 80 & 100



**Cobra Planer Tooth**

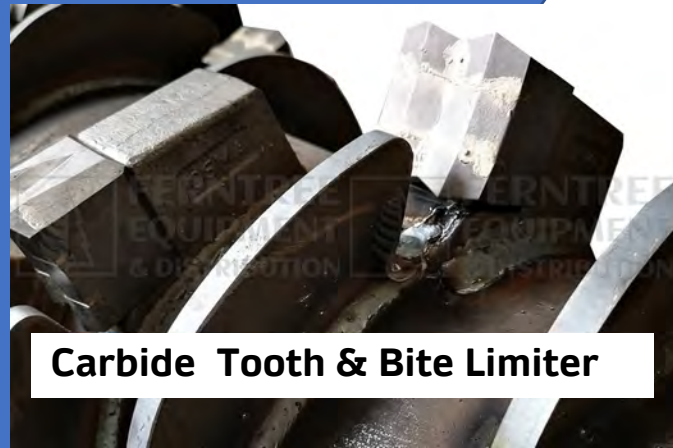

**Carbide Tooth & Bite Limiter**

Performance/Counter knife

Maintenance

Fixed Piston or Variable



**3F OSMA Valve**

1.By-pass 2.Anti shock 3. Automatic Oil flow regulation

## Technical Specification TFXL-Q

Model	Weight lbs	Flow Gpm	Pressure PSI	Working width	Tools	Motor CC	Drive line
TFXL 80	925	15 – 20 (21- 26)	3220 - 3620 Anti Cavitation Valve	31	18	25 or 34cc Optional (47cc)	3 V Belts
TFXL 100	1084	15- 24 (21 -26)	3220 - 3620 Anti Cavitation Valve	39	22	34 or 47CC Optional VM28	4 V Belts

Technical data are dependent on equipment and may vary. The images may contain additional options which do not belong to the standard scope of delivery. **OSMA** and **FERNTREE Equipment** reserves the right to make amendments and updates at any time without prior notice.

## Standard Equipment

- Hydraulic hoses
- Carbide tooth
- Belt transmission 34cc 3 Belts
- Rear Chain Guard
- Flat pack/ base plate
- Hardox / DOMEX Steel frame
- Counter knife
- DCR – Bite Limiter Rotor

## Optional Equipment

- 47 cc for TFXL 80
- Bosch Rexroth VM 28
- Carbide from Factory
- Black Main Frame ( Sp.order)
- Excav. Mounting Bracket



**FERNTREE  
EQUIPMENT  
& DISTRIBUTION**  
YOUR QUALITY BRAND CONNECTION

**Import & Distribution  
North-America**

Info@ferntree.ca  
+1 778 222 9111  
Guelph Ontario  
Canada www.ferntree.ca

