


# FF Series Mulcher

Forestry Mulcher for Excavator with fixed tool Rotor  
5t – 12t Carrier



**FERNTREE  
EQUIPMENT  
& DISTRIBUTION**



**FF Series**  
Developed and Build in Italy for  
the North American Market



**FF Series** – Our most versatile fixed hammer excavator mulcher. The Flow Control Valve offers Customized set up specific to your excavator.



**STANDARD EQUIPMENT**

- 17/34 cc variable manual displacement hydraulic piston motor (50-124 L/min)
- Bulkhead for hydraulic connections
- 55/38 cc variable torque hydraulic piston motor (80-135 L/min) (DML/HY/VT)
- Flow control valve with mechanical adjustment
- Safety and ant cavitation valve
- Protection chains Enclosed / anti dust machine
- Frame welded counter knives
- Belt Transmission
- Motor enclosed in frame
- Replacement skids
- Depth control rotor ( DCR )
- 2.5m hydraulic hoses



Double Planer



Planer carbide



Carbide



Rock Carbide





**FLOW CONTROL VALVE , PAIRED WITH VARIABLE OR FIXED PISTON MOTOR AND FLUID BOX**



Flow Control Valve for a complete and safe engine management with relief valve, anti-cavitation system. E flow regulation for Rotor RPM

MODEL	FF32	FF40
CUTTING WIDTH (inch/metric)	32/80	40/100
WEIGHT (Lbs/Kg)	951/430	1128/510
OIL PRESSURE(bar) 1Bar=14.5psi	220-250	220-250
OIL FLOW (l/min) 1Gpm = 3.78L	60-80	60-80
NUMBER OF TOOLS	20	24
MAX CUTTING DIAMETER (inch/metric)	12/300	12/300
DIMENSION A (mm)	32/80	40/100
DIMENSION B (mm)	41/106	49/126

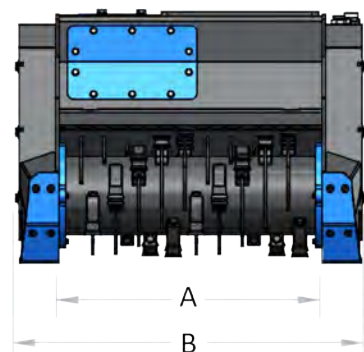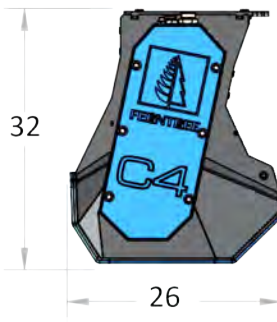

Data refers to machine as standard. The technical data in this catalogue may be altered without prior notice